



T167 HYDRO-STATIC PIPEBURSTER

SPECIFICATIONS & DATA SHEET

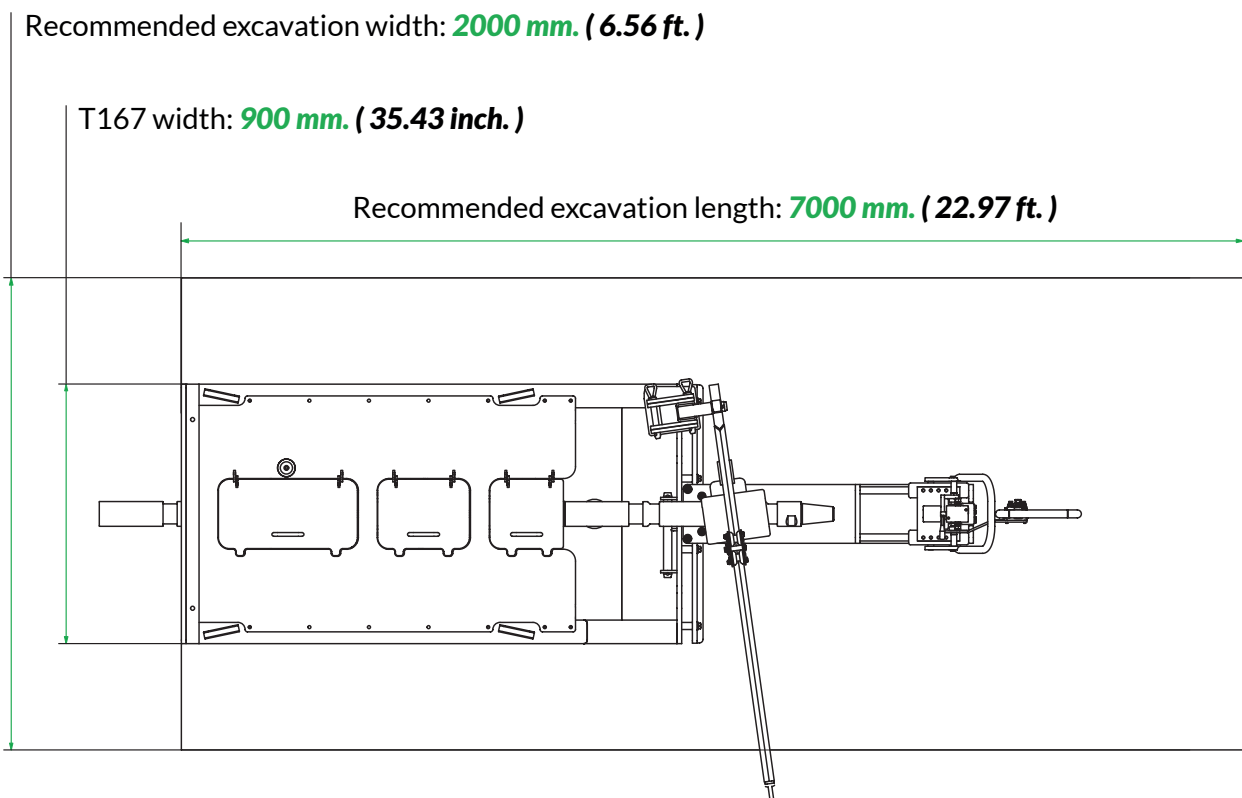

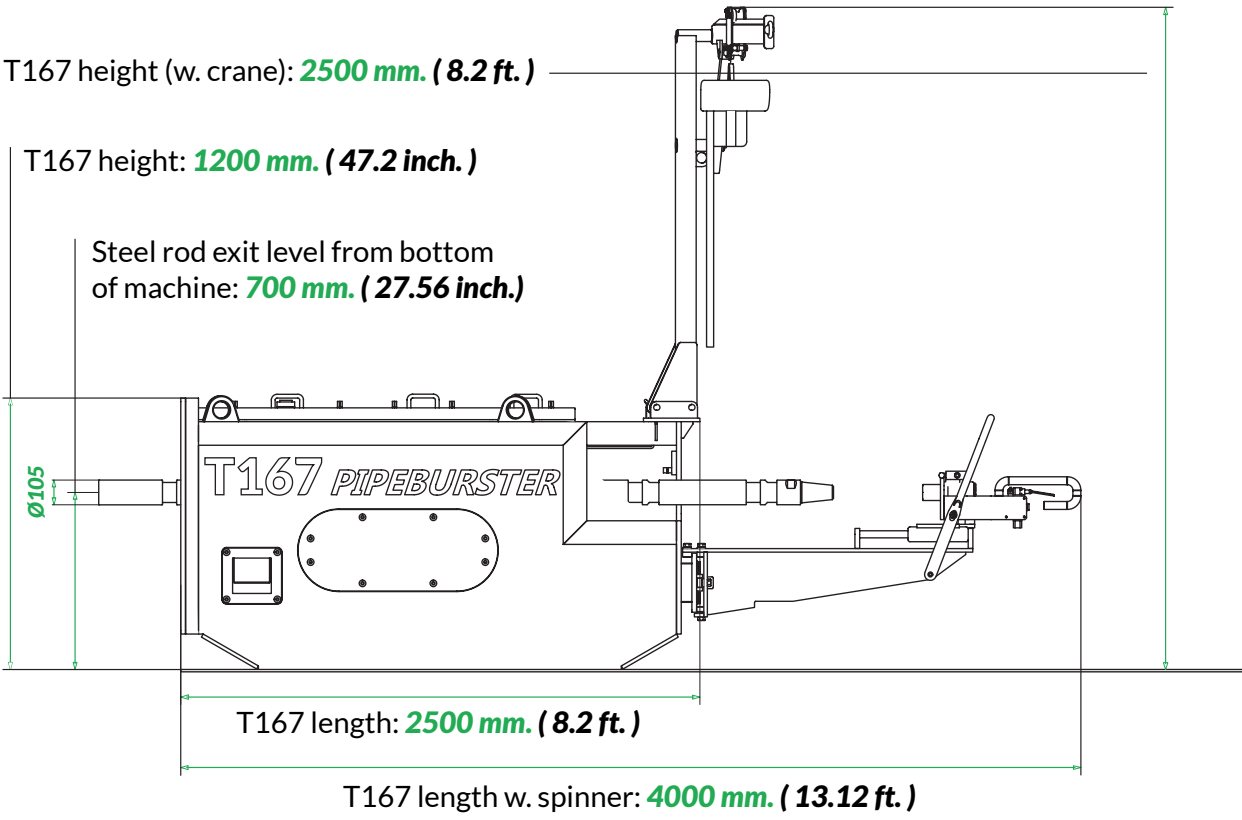

T167

Hydro-static pipeburster with 170 metric tons of pulling power (374786 lbs.)

Hydraulic power pack

T167 hydraulic power pack, model PP-08.

Specifications	Pulling unit	Power pack	Steel rods
Pulling force	170 metric tons (374786z lbs.)		
Measurements	250 x 90 x 120 cm. (98.4 x 35.4 x 47.2 inch.)	180 x 140 x 115 cm. (70.9 x 55.1 x 45.3 inch.)	Ø86 mm. x 1.0 meter (3.4 x 39.4 inch.)
Weight	4000 kg. (8818 lbs.)	1900 kg. (4188 lbs.)	64 kg. (88 lbs.)
Engine		KUBOTA DIESEL ENGINE 4-Cyl. Turbo charged 53 kW. / 71 bhp. @ 2700 rpm. Water cooled Common rail direct injection EPA/CARB Tier 4 EU stage 5	
Hydraulic system	3 cylinders	Max 250 bar (3625 psi.) Hydraulic oil cap. 600 ltr. (158.50 gal.) Variable 1-circuit piston hydraulic pump 130 ltr. / min. (34.34 gal.) Measured at 2500 rpm. / min.	
Operational speed	Up to 2.0 meter. / min. (6.6 ft. / min.) Stroke; 50 cm. (19.9 inch.)		
Operational range, Existing pipe diameter	Ø150 mm. → Ø710 mm. (5.9 → 28 inch.)		